

Visual Studio Code and opening a file by file type



Visual Studio Code and open the program that is associated with the file's extension. This article covers both Mac and Windows.

Mac

1. CMD-Shift-P
2. Tasks: Configure Task
3. Add this JSON to the task

```
{
  "version": "2.0.0",
  "tasks": [
    {
      "label": "Open file",
      "type": "shell",
      "command": "open",
      "args": ["${file}"]
    }
  ]
}
```

Windows


1. Ctrl-Shift-P or F1
2. Tasks: Configure Task
3. Add this JSON to the task file

```
{
  "version": "2.0.0",
  "tasks": [
    {
      "label": "Open file",
      "type": "shell",
      "command": "explorer.exe",
      "args": ["${file}"]
    }
  ]
}
```

References

[How to view my HTML code in the browser with Visual Studio Code?](#)

Setting SSH Key Permissions

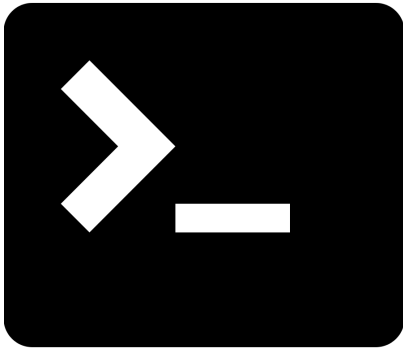

If you use [ssh \(Secure Shell\)](#) then you have likely encountered this error.

```
iTerm2  Shell  Edit  View  Session  Scripts  Profiles  Toolbelt  Window  Help
~ > $ ssh bitnami@somehost.com
Warning: Permanently added 'somehost.com' (ECDSA) to the list of known hosts.
bitnami@somehost.com : Permission denied (publickey).
~ > $ 255
```

If you haven't generated a key, then you'll want to use [ssh-keygen](#) to create a key for ssh sessions.

Linux

Usually, your key file will be located at `~/.ssh/id_rsa.pub` on UNIX based systems

```
chmod 600 path/to/key/keyfile
```

Windows

Usually, your key file will be located at
%USERPROFILE%\ssh\id_rsa.pub

Run this command to enable inheritance

```
icacls path/to/key/keyfile /inheritance:r  
processed file: keyfile
```

Successfully processed 1 files; Failed processing 0 files

Run this command to grant read access to your user on the file

```
icacls file /grant:r yourusername:"(R)"  
processed file: keyfile  
Successfully processed 1 files; Failed processing 0 files
```